


Drop Forged, Machined, and Heat Treated. Well Suited for General Repair Work.

| A | Max. Jaw Capacity | B | C | Weight Each-Lbs. | Chrome | Std. Pkg. Qty. |
|----|-------------------|------|-------|------------------|----------|----------------|
| | | | | | Part No. | |
| 11 | 3 | 7/16 | 1 1/2 | 1.5 | 89311 | 1 |

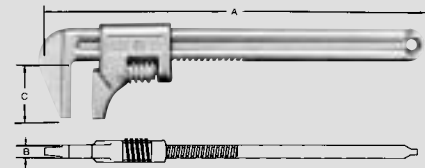

ADJUSTABLE AUTO WRENCH

Extra Deep Throat, Copper Plated Fatigue Proof Spindles, Permanent Type Pads.


| Inch Capacity | Throat Depth | Spindle Diameter | Minimum Proof Test | Weight Each-Lbs. | Part Number | Std. Pkg. Qty. |
|---------------|--------------|------------------|--------------------|------------------|-------------|----------------|
| 0-2 1/2 | 2 1/4 | 9/16 | 3500 lbs. | 1.4 | CC402 | 1 |
| 0-3 | 2 1/2 | 9/16 | 3500 lbs. | 2.2 | CC403 | 1 |
| 0-4 1/2 | 3 1/4 | 3/4 | 6200 lbs. | 3.4 | CC404 | 1 |
| 0-6 1/8 | 4 1/8 | 3/4 | 6900 lbs. | 5.0 | CC406 | 1 |
| 0-8 1/4 | 5 | 3/4 | 6600 lbs. | 6.2 | CC408 | 1 |
| 2-10 1/8 | 6 | 3/4 | 8000 lbs. | 10.0 | CC410 | 1 |
| 2-12 1/4 | 6 1/8 | 7/8 | 9300 lbs. | 13.0 | CC412 | 1 |



EXTRA DEEP THROAT CLAMP

Shot Blasted Finish Meets ANSI B18.15-1985

| A | Threads/Inch | B | Eye | | *Rated Capacity | Weight Each-Lbs. | Part Number | Std. Pkg. Qty. |
|-------|--------------|-------|--------|----------|-----------------|------------------|-------------|----------------|
| | | | C | D | | | | |
| 1/4 | 20 | 1 | 3/4 | 1 3/16 | 400 | .05 | EB1 | 1 |
| 5/16 | 18 | 1 1/8 | 7/8 | 1 1/8 | 680 | .09 | EB2 | 1 |
| 3/8 | 16 | 1 1/4 | 1 | 1 1 1/16 | 1000 | .13 | EB3 | 1 |
| 7/16 | 14 | 1 1/2 | 1 1/16 | 1 1 3/16 | 1380 | .19 | EB4 | 1 |
| 1/2 | 13 | 1 1/2 | 1 3/16 | 2 1/8 | 1840 | .30 | EB5 | 1 |
| 5/8 | 12 | 1 3/4 | 1 1/4 | 2 1/4 | 2370 | .70 | EB6 | 1 |
| 3/4 | 11 | 1 3/4 | 1 3/8 | 2 3/8 | 2940 | .55 | EB7 | 1 |
| 7/8 | 10 | 2 | 1 1/2 | 2 3 3/16 | 4340 | .89 | EB8 | 1 |
| 1 | 9 | 2 1/4 | 1 3/4 | 3 1/8 | 6000 | 1.3 | EB9 | 1 |
| 1 1/8 | 8 | 2 1/2 | 1 3/4 | 3 3/8 | 7880 | 2.0 | EB10 | 1 |
| 1 1/4 | 7 | 2 3/4 | 2 | 4 | 9920 | 2.9 | EB11 | 1 |
| 1 1/2 | 7 | 3 | 2 3/8 | 4 1/8 | 12800 | 4.0 | EB12 | 1 |
| 1 3/4 | 6 | 3 1/2 | 2 1/2 | 5 1/8 | 18260 | 6.3 | EB14 | 1 |

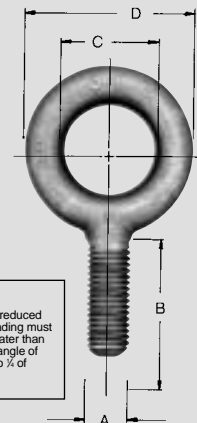


WARNING
Rated capacity is substantially reduced when loading at any angle. Loading must never be made at an angle greater than 45° from bolt centerline. At an angle of 45° rated capacity is reduced to 1/2 of shown rating.

EYEBOLTS PLAIN PATTERN

Shot Blasted Finish Meets ANSI B18.15-1985

| A | Threads/Inch | B | Eye | | E | *Rated Cpcy.-Lbs. | Weight Each-Lbs. | Part Number | Std. Pkg. Qty. |
|-------|--------------|-------|--------|----------|--------|-------------------|------------------|-------------|----------------|
| | | | C | D | | | | | |
| 1/4 | 20 | 1 | 3/4 | 1 3/16 | 1 1/16 | 400 | .05 | EB21 | 1 |
| 5/16 | 18 | 1 1/8 | 7/8 | 1 1/8 | 7/8 | 680 | .11 | EB22 | 1 |
| 3/8 | 16 | 1 1/4 | 1 | 1 1 1/16 | 1 1/8 | 1000 | .21 | EB23 | 1 |
| 7/16 | 14 | 1 1/2 | 1 1/16 | 1 1 3/16 | 1 3/8 | 1380 | .28 | EB24 | 1 |
| 1/2 | 13 | 1 1/2 | 1 3/16 | 2 1/8 | 1 3/8 | 1840 | .43 | EB25 | 1 |
| 5/8 | 12 | 1 3/4 | 1 1/4 | 2 1/4 | 1 1/2 | 2370 | .70 | EB26 | 1 |
| 3/4 | 11 | 1 3/4 | 1 3/8 | 2 3/8 | 1 5/8 | 2940 | .77 | EB27 | 1 |
| 7/8 | 10 | 2 | 1 1/2 | 2 3 3/16 | 1 7/8 | 4340 | 1.2 | EB28 | 1 |
| 1 | 9 | 2 1/4 | 1 3/4 | 3 1/8 | 2 1/8 | 6000 | 1.9 | EB29 | 1 |
| 1 1/8 | 8 | 2 1/2 | 1 3/4 | 3 3/8 | 2 3/8 | 7880 | 2.6 | EB30 | 1 |
| 1 1/4 | 7 | 2 3/4 | 2 | 4 1/8 | 2 3/8 | 9920 | 3.7 | EB31 | 1 |
| 1 1/2 | 7 | 3 | 2 3/8 | 4 1/8 | 2 7/8 | 12600 | 4.9 | EB32 | 1 |
| 1 3/4 | 6 | 3 1/2 | 2 1/2 | 5 1/8 | 3 1/8 | 18260 | 8.0 | EB34 | 1 |

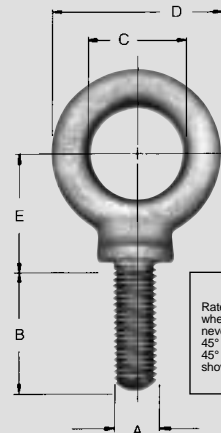

WARNING
Rated capacity is substantially reduced when loading at any angle. Loading must never be made at an angle greater than 45° from bolt centerline. At an angle of 45° rated capacity is reduced to 1/2 of shown rating.

EYEBOLTS SHOULDER PATTERN